
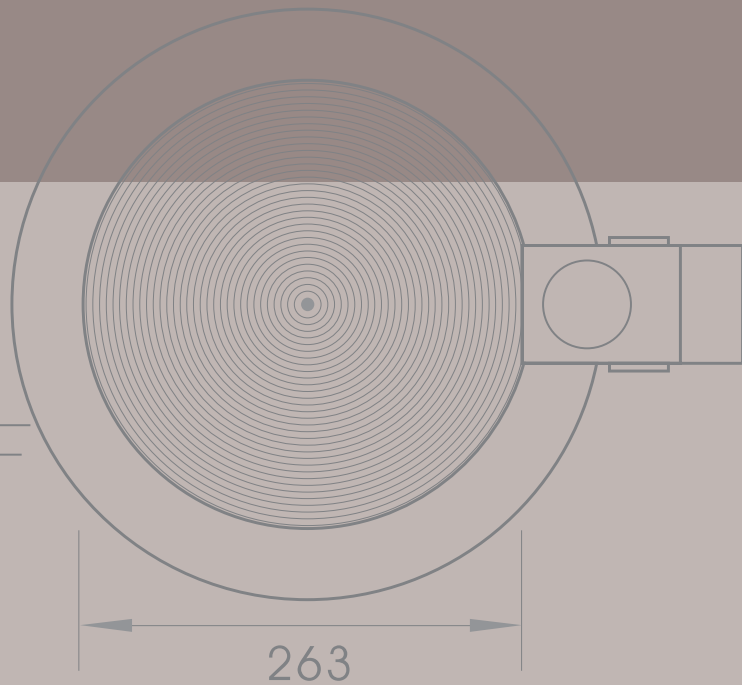
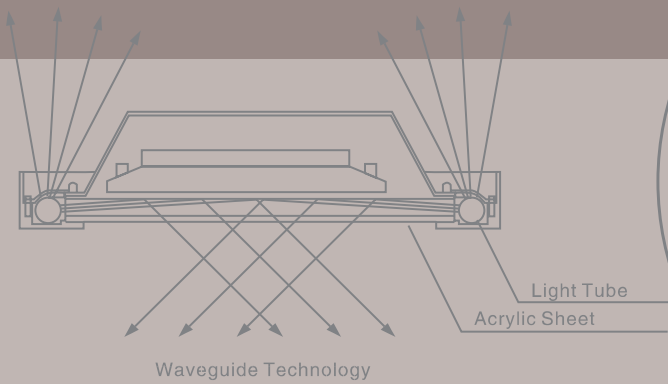
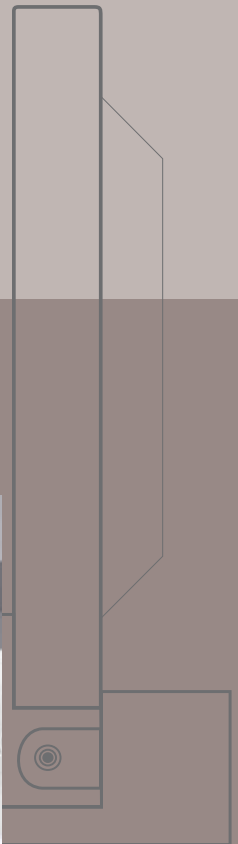


Vision

T5 Circular Lamp Fixture

305

82

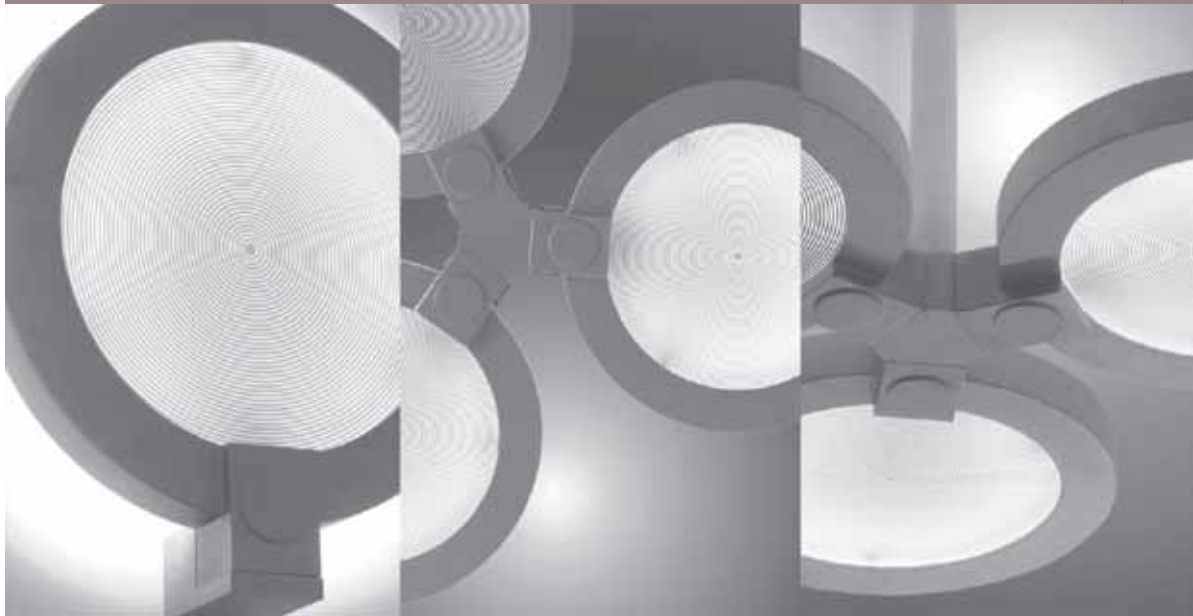


200320125205.X

- Clean, contemporary, low glare fixture series.
- Lamp: T5 circular fluorescent.
- Installation methods: suspended, wall-mounted or free-standing.
- Plain translucent, concentric circular or honeycomb screened diffusers. Custom screened diffusers are available upon request.
- Ideal for projects, where low glare and clean aesthetics are desirable.
- Broad variety of applications, incl. Corporate (work stations, board rooms, etc.), retail, hospital and residential, etc.




Vertical Wall-Mounted

VS-H10-1 T5 55W G10q

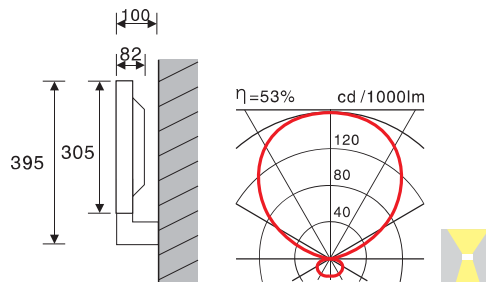

Horizontal Wall-Mounted

VSA-H10-1 T5 55W G10q

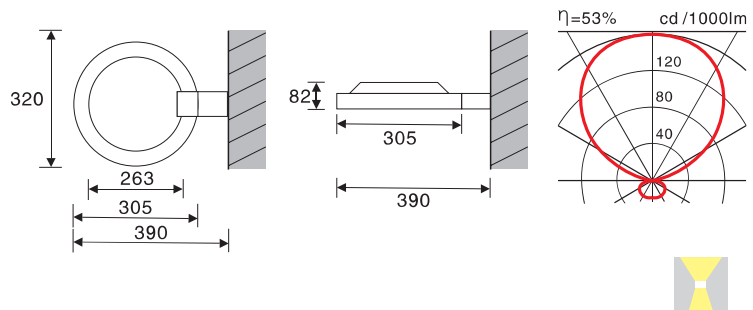

Colour filter available upon request,
The ambience of colour filter is only visible when the luminaire is switched on.











1 leaf Ceiling Pendant Mounted

VSD-H10-1 T5 55W G10q

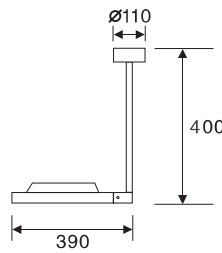



2 leaves Ceiling Pendant Mounted

VSD-H10-2 T5 2x55W G10q

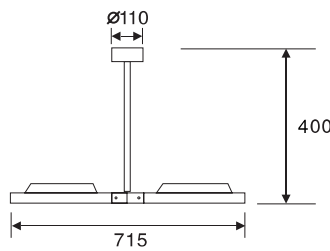


3 leaves Ceiling Pendant Mounted

VSD-H10-3 T5 3x55W G10q



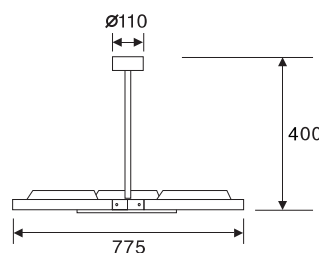




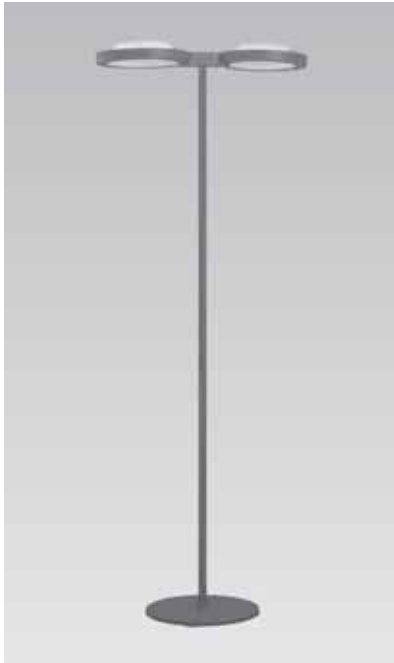




2 leaves Free Standing

VSB-H10-2 T5 2x55W G10q

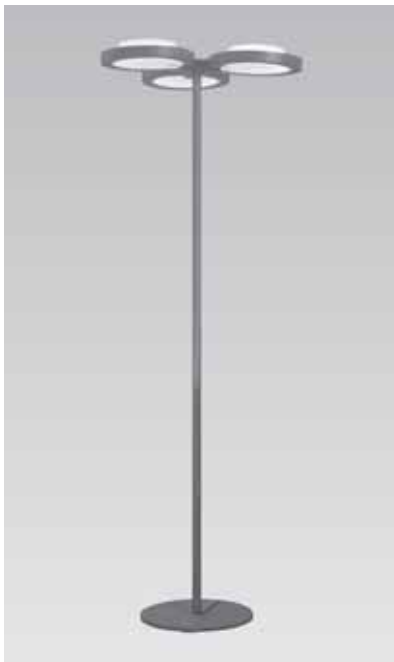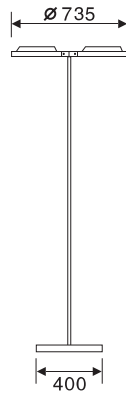


3 leaves Free Standing


VSC-H10-3 T5 3x55W G10q

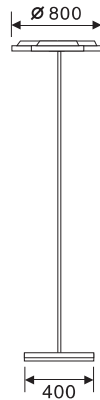

| Vision II |

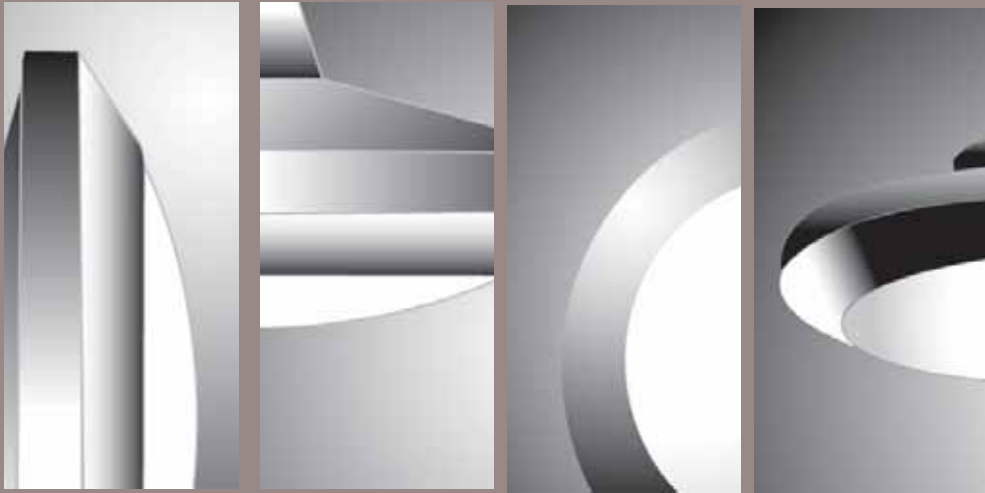

In addition to optimal direct light. The wall or ceiling fixture VISION II gives indirect light which brightens the wall or ceiling behind the fixture. For emotional room design different colour diffuser are dispostal. The robust polycarbonate housing and die-casting aluminium ring are ideal for outdoor application. IP55 protection.

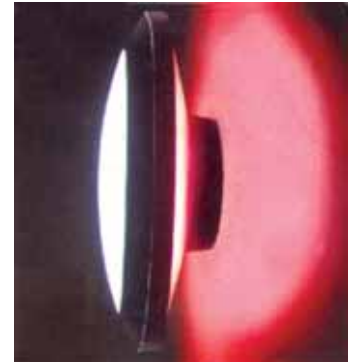

VSII-01AL

Incandescent Max 2x60w
E14




VSII-02AL

TC-D 2x26W
G24d-3



VSII-03AL



1xTC-DD 38W

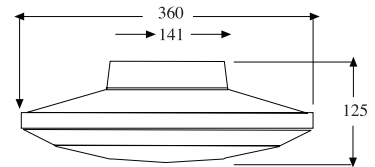


Optional

Back cover colour diffuser

| Vision III |

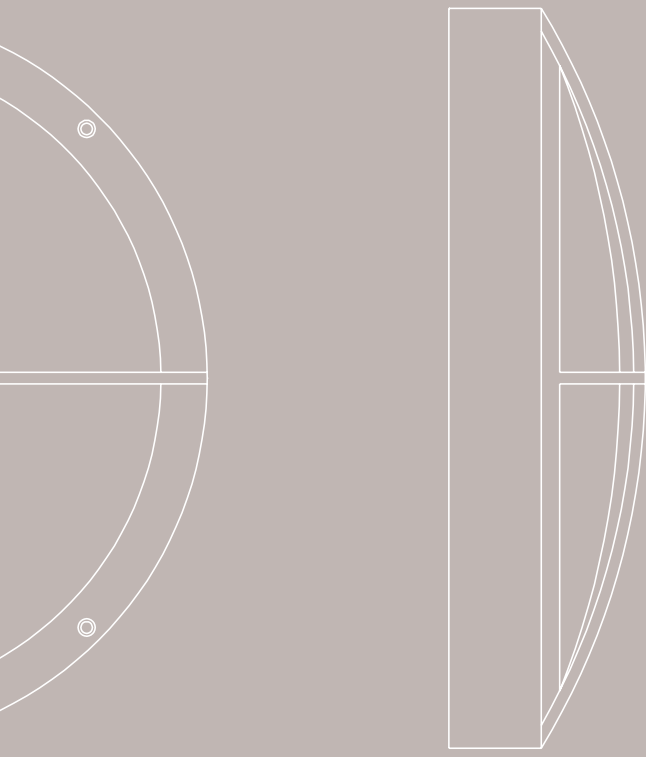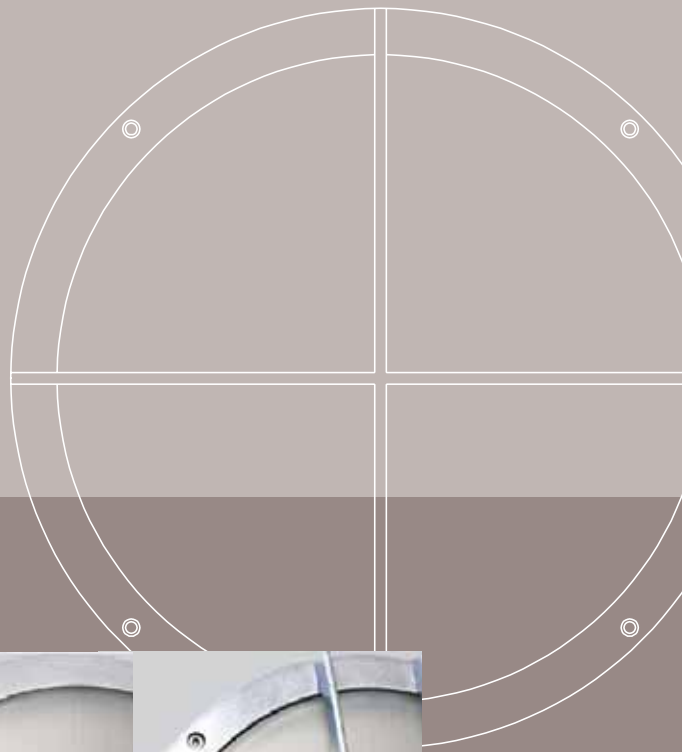


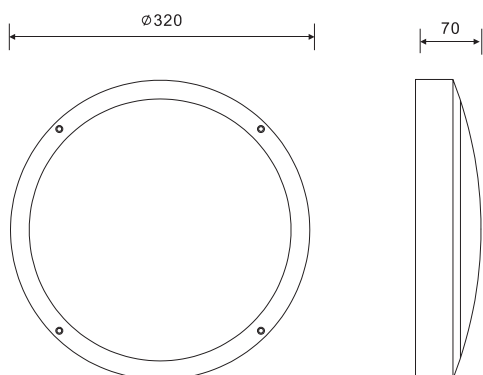

Die cast aluminium housing
Powder painting surface treatment
Transparent PC diffuser
Rubber gasket in silicone type
Integral control gear
Double cable entry
Fixing screws in stainless steel
IP55



VSIII-0101 TC-D Max26W G24d -3, -2, -1
VSIII-0102 2D Max28W GR-8

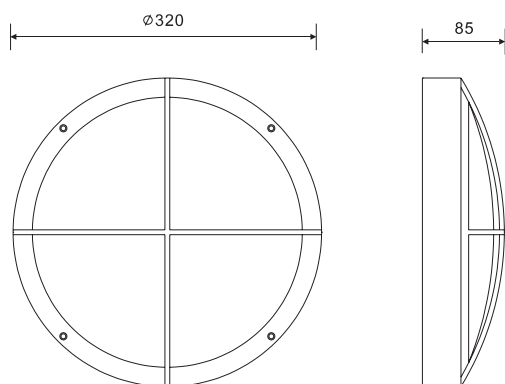

Die cast aluminium housing
Powder painting surface treatment
Transparent PC diffuser
Rubber gasket in silicone type
Integral control gear
Double cable entry
Fixing screws in stainless steel
IP55




VSIII-0401 TC-D Max26W G24d -3, -2, -1
VSIII-0402 2D Max28W GR-8

VISION III


Wall Light




VSIII-0501 TC-D Max26W G24d -3, -2, -1
VSIII-0502 2D Max28W GR-8

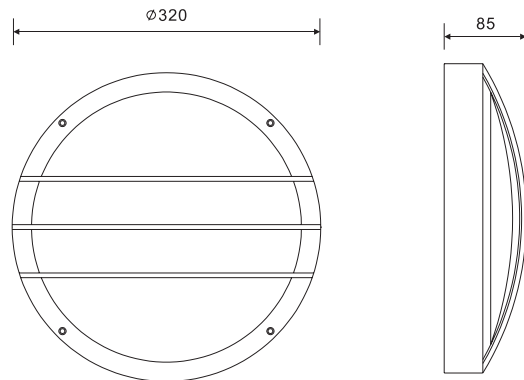

Die cast aluminium housing
Powder painting surface treatment
Transparant PC diffuser
Rubber gasket in silicone type
Integral control gear
Double cable entry
Fixing screws in stainless steel
IP55

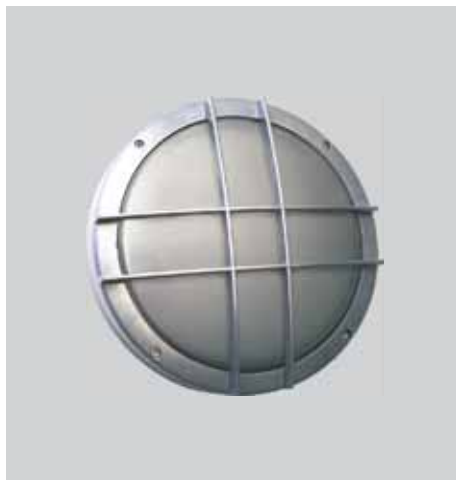

VSIII-0501 TC-D Max26W G24d -3, -2, -1
VSIII-0502 2D Max28W GR-8

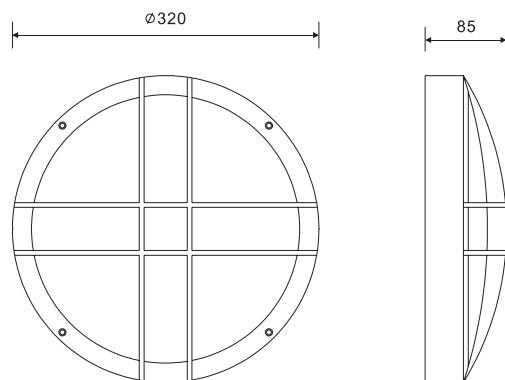

Die cast aluminium housing
Powder painting surface treatment
Transparant PC diffuser
Rubber gasket in silicone type
Integral control gear
Double cable entry
Fixing screws in stainless steel
IP55