

PRAHA
lighting



6W LED DOWNLIGHT



Product Series


model number	color temperature	Power consumption	Beam Angle
AKDL56B5	5200K	6.5W	25 degree
AKDL36B5	3000K	6.5W	25 degree
AKDL56B3	5200K	6.5W	15 degree
AKDL36B3	3000K	6.5W	15 degree

Applications & Purpose

Area: Indoor use only.
Purpose: Middle down light

Specifications

Outline Dimension: $\varnothing 125.5 \times 74.5$ mm (L)
LED Light Source: 1W x 6 ea
Color Temperature: 5200 ± 400 K / 3000 ± 300 K
Beam Angle: 25 / 15 degree
Input Voltage: 100~240 Vac
Power Consumption: 6.5 W
Net Weight: 340g
Operation Temperature: $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$
Ceiling Drill Hole: $\varnothing 116$ mm

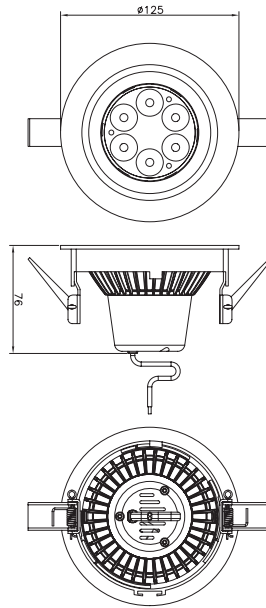

Packaging Information

Packing: 24 boxes / carton		
box	170x155x110(mm)	455g
carton	540x467x333(mm)	12.5kg

Optical Performance

CCT	Model Number	Beam Angle	Lumen (typ.)	CRI (typ.)	
5200 ± 400 K	AKDL56B5	25 degree	486	70	
3000 ± 300 K	AKDL36B5	25 degree	388	75	
5200 ± 400 K	AKDL56B3	15 degree	484	70	
3000 ± 300 K	AKDL36B3	15 degree	387	75AKA	

